

ioPAC 6500 Series (65M) CPU Modules

CPU modules for modular programmable IIN controllers



Features and Benefits

- Supports multiple IT/OT protocols for seamless communication between SCADA, Plant Information System, and cloud applications
- Tool-free hardware installation and hot-swap design for maximizing operation efficiency
- Fully modular design for maximum deployment flexibility
- IINxpress IDE utility combines IEC 61131-3 programming, configuration, and protocol services to streamline workflow and reduce programming efforts
- Enhanced security with built-in functions including Secure Boot, password-cracking defense, intrusion detection, and DoS defense

Certifications



Introduction

The ioPAC 6500 Series (also referred to as Intelligent Integrated Node or IIN) is an advanced Linux-based RTU featuring a built-in Layer-2 managed switch. Equipped with an Arm Cortex-A53 quad-core CPU, the ioPAC 6500 Series delivers robust performance.

6C Competencies


The ioPAC 6500 Series delivers the following competencies to your projects:

- **Control:** Precision control of your equipment
- **Communication:** Protocol support to connect to other devices and systems
- **Computing:** Applications for computing and data processing
- **Connectivity:** Versatile set of media interfaces
- **Cloud:** Cloud connectivity and cloud edge computing
- **Cybersecurity:** Security features to protect the devices and data



Fully Modular Design

The ioPAC 6500 Series features a unique Lego-like mechanical design that allows for flexible deployment while minimizing installation efforts. The series can be divided into the components: Backplane modules, power modules, communication modules, expansion modules, CPU modules, I/O modules, and terminal-block modules.

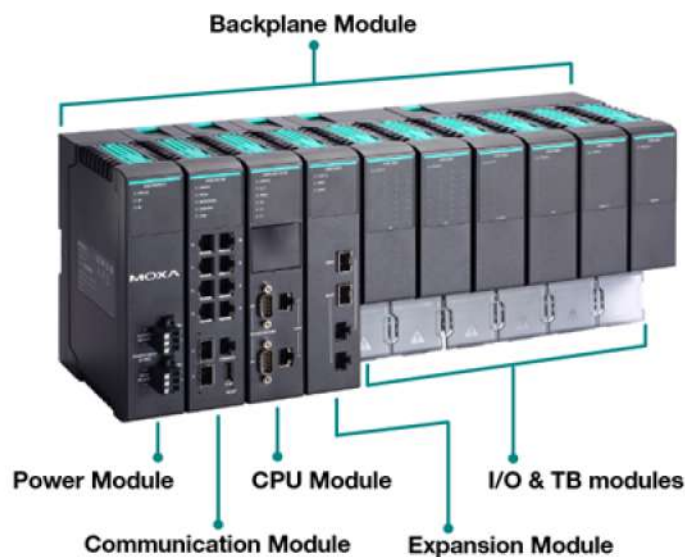

IEC 61131-3 Automation Programming

The ioPAC 6500 Series features IEC 61131-3 automation programming for flexibility in automation design and consistency in syntax and semantics, promoting interoperability between systems, thereby reducing development complexity in automation projects. Five languages are available: LD, FBD, SFC, IL, and ST, allowing automation professionals to choose the programming language that best suits their needs.

Specifications

Controller

CPU	Arm Cortex-A53 quad-core 1.6 GHz
OS	Moxa Industrial Linux 3 (Debian 11, kernel 5.10) See www.moxa.com/MIL
SDRAM	4 GB DDR4
MRAM	512 KB (for logger)
Storage Preinstalled	8 GB eMMC (4 GB reserved for users)
Buttons	Reset

Control Logic

Language	IEC 61131-3 programming languages
----------	-----------------------------------

Ethernet Interface

10/100/1000BaseT(X) Ports (RJ45 connector)	2 MACs (IPs)
Magnetic Isolation Protection	1.5 kV (built-in)

Serial Interface

No. of Ports	2
Connector	DB9 male
Serial Standards	RS-232/422/485
Baudrate	300, 1200, 1800, 2400, 4800, 9600, 19200, 28800, 38400, 57600, 115200 bps
Parity	None, Even, Odd
Data Bits	7,8

Stop Bits	1, 2
Flow Control	RTS/CTS, XON/XOFF
Serial Signals	
RS-232	TxD, RxD, RTS, CTS, GND
RS-422	Tx+, Tx-, Rx+, Rx-, GND
RS-485-2w	Data+, Data-, GND
System Power Parameters	
Input Current	0.8 A @ 12 VDC
Physical Characteristics	
Housing	Plastic
Dimensions	42 x 177 x 134.8 mm (1.65 x 6.97 x 5.31 in)
Weight	625 g (1.38 lb)
Installation	DIN-rail mounting Rack mounting (with optional kit)
Environmental Limits	
Operating Temperature	-40 to 75°C (-40 to 167°F) Note: Proper airflow is required in an environment with temperature > 65°C
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
Altitude	2000 m
Standards and Certifications	
EMC	EN 55032/35 EN 61000-6-2/-6-4
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: (DC) 1 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: (DC) 0.5 kV L-N, 1 kV L/N-PE; Signal: 1 kV; IO: 0.5 kV IEC 61000-4-6 CS: Power: 10 Vrms; Signal: 10 Vrms IEC 61000-4-8 PFMF: 30 A/m
Safety	UL 61010-1 UL 61010-2-201
Shock	IEC 60068-2-27 Half sine wave; acceleration: 15 g; time: 11 ms
Vibration	IEC 60068-2-6 DIN-rail mounted: 7 mm peak-peak (p-p) (2 to 8.42 Hz), 1 g (8.42 to 150 Hz) Rack mounted (with optional kit): 7 mm peak-peak (p-p) (2 to 8.42 Hz), 0.5 g (8.42 to 150 Hz)
Package Vibration Test	ISTA 1A
Package Drop Test	ISTA 1A

MTBF

Time	1,830,589 hrs
Standards	Telcordia Standard SR-332

Warranty


Warranty Period	5 years
Details	See www.moxa.com/warranty

Package Contents

Device	1 x ioPAC 6500 Series (65M) CPU module
Documentation	1 x warranty card 1 x quick installation guide

Dimensions

Unit: mm (inch)

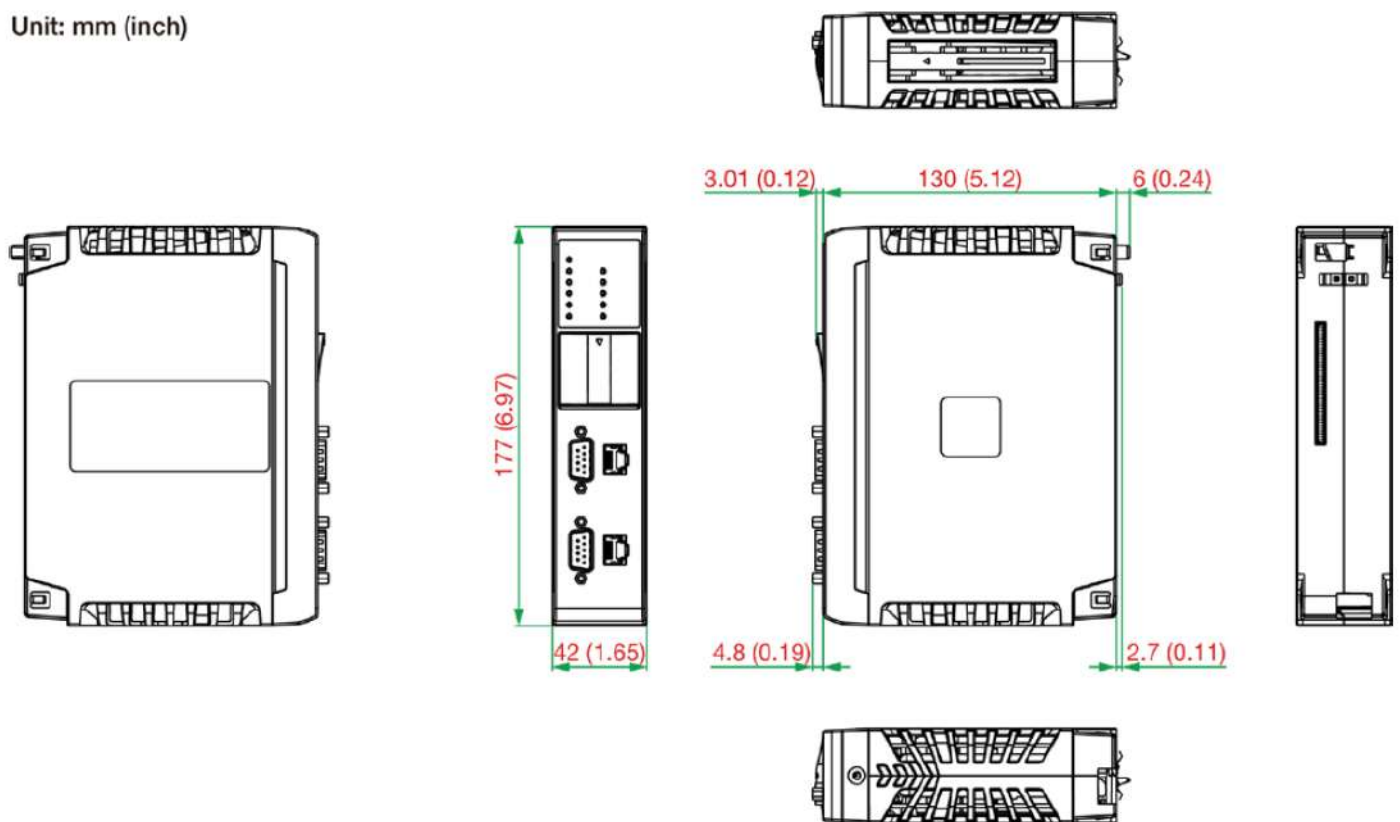

Ordering Information

Model Name	Programming Support	Ethernet Ports	Serial Ports	Conformal Coating	Operating Temperature
65M-CPU14-IEC-CT-T	IEC 61131-3 programming languages	2 (RJ45)	2 (RS-232/422/485)	Yes	-40 to 75°C

© Moxa Inc. All rights reserved. Updated Nov 07, 2025.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.